
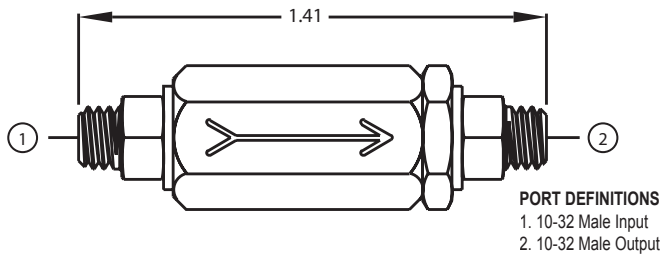


# 110 UNIVERSAL CHECK VALVE

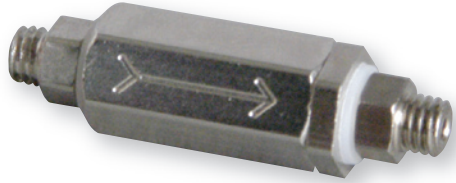

## Design Considerations


The 110 Check Valve Series promotes a compact design with multiple end configurations to fit the exact end use application. The 110 Check Valves incorporate a Guided Piston with an embedded o-ring that seals on the seat, providing a positive seal at low back pressure or a slight vacuum. The 110 check Valves have a 1 psi Cracking Pressure and are rated to 125 psi. A 1 psi Hastelloy Spring is available for chemical resistance applications.

## Specifications

Body & Piston: Electroless Nickel Plated Brass  
 Spring: 302 Stainless Steel

Maximum Operating Pressure – 0 - 125 psi  
 Maximum Operating Temperature – -25°F to 180°F  
 Flow Rate – 2.5 SCFM @ 50 psi

## Example of How to Order

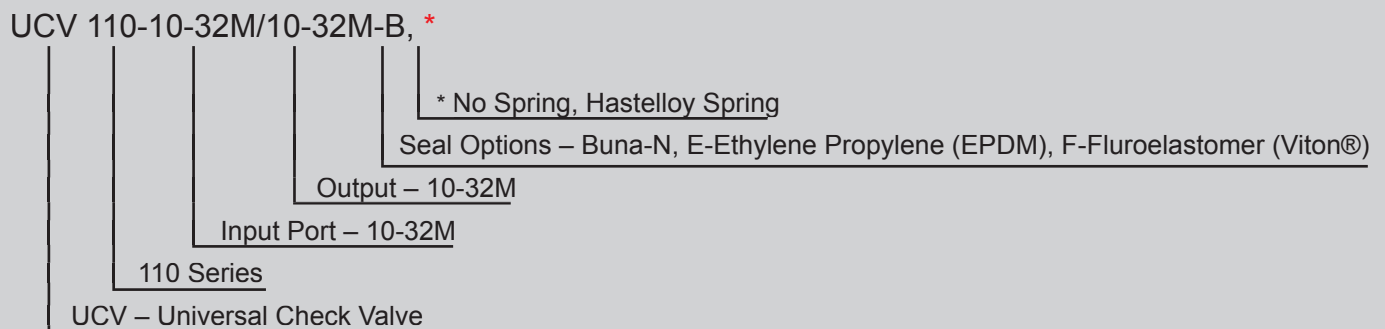

\*\*\* Specify asterisk items only if other than standard