



M SERIES



Design Considerations

The M Swivel Series promotes a compact design with multiple configurations to cover 10-32 Inline applications. The Standard M Swivel has low torque and is sealed with Buna-N o-ring. Ethylene Propylene, Fluoroelastomer (Viton®) are available.




Specifications

Body: Electroless Nickel Plated Brass

Maximum Operating Pressure – 0 - 125 psi
 Maximum Operating Temperature – -25°F to 180°F
 CV – .1

Example of How to Order

SWIVEL, M, 10-32MM, B

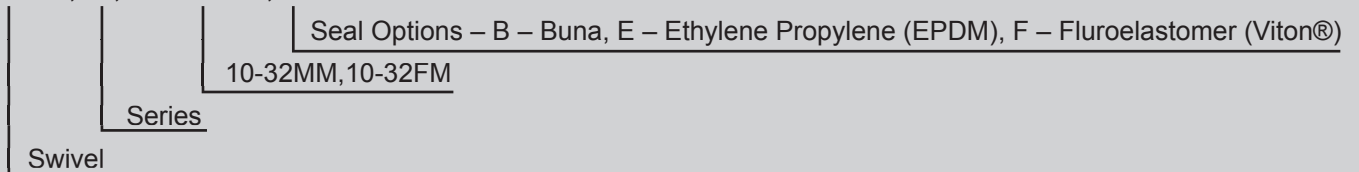

MARR VALVE CO will quote alternate materials or customize our standard products when quantities ensure competitive pricing.

MARR VALVE CO will quote alternate materials or customize our standard products when quantities ensure competitive pricing.