
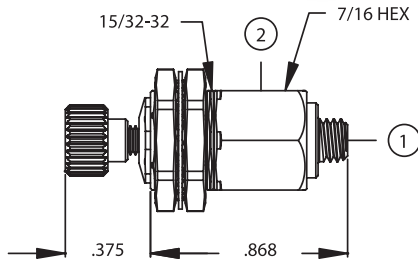


# 10-32M,10-32F - MINI NEEDLE VALVE

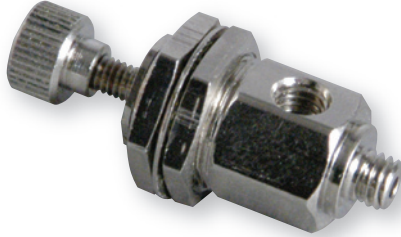

**PORT DEFINITIONS  
 For Routing Two Outputs**  
 1. 10-32 Male Input  
 2. 10-32 Female Output

## Design Considerations

The MNV Series Needle Valve promotes a compact design with multiple configurations to fit the exact end use application. The Needle is Electroless Nickel Plated Brass with a small Knurled Knob and has a 5-Turn Adjustment. The Panel Mount Needle Valves require a .500 hole and are supplied with two Electroless Nickel Plated Panel Nuts and washer.


## Specifications

Body & Panel Nuts: Electroless Nickel Plated Brass  
 Stem: Electroless Nickel Plated Brass  
 Panel Mounting: 1/2" Panel Hole, 1/4" Max. Thickness

Maximum Operating Pressure – 0 - 125 psi  
 Maximum Operating Temperature – -25°F to 180°F  
 Flow Rate – 2.5 SCFM @ 50 psi

## Example of How to Order

MNV 2 SV -B,10-32M, 10-32F

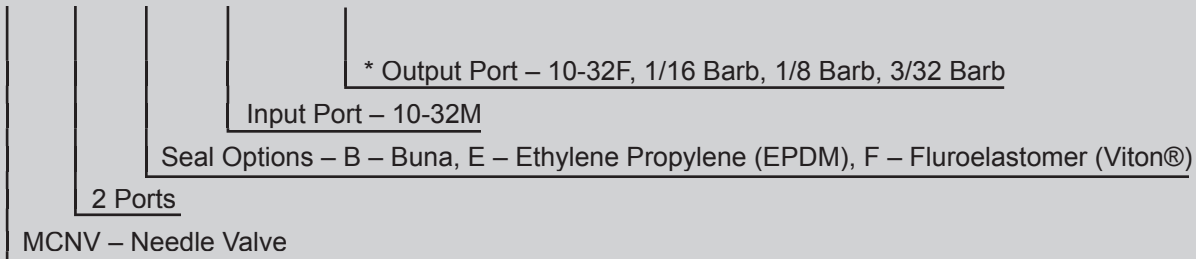

\*\*\* Specify asterisk items only if other than standard