


1/8M,10-32F - MINI NEEDLE VALVE

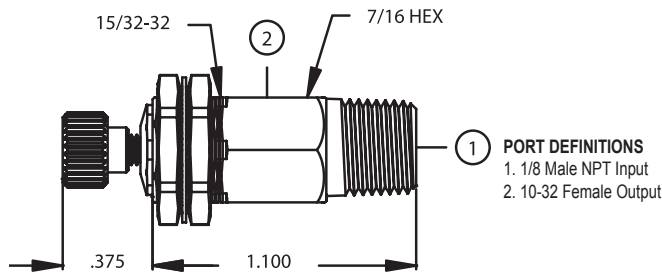

Design Considerations

The MNV Series Needle Valve promotes a compact design with multiple configurations to fit the exact end use application. The Needle is Electroless Nickel Plated Brass with a small Knurled Knob and has a 5-Turn Adjustment. The Panel Mount Needle Valves require a .500 hole and are supplied with two Electroless Nickel Plated Panel Nuts and washer.

Specifications

Body & Panel Nuts: Electroless Nickel Plated Brass
 Stem: Electroless Nickel Plated Brass
 Panel Mounting: 1/2" Panel Hole, 1/4" Max. Thickness

Maximum Operating Pressure – 0 - 125 psi
 Maximum Operating Temperature – -25°F to 180°F
 Flow Rate – 2.5 SCFM @ 50 psi

Example of How to Order

MNV 2 SV -B, 1/8M, 10-32F

