


# 1/8 MNPT NEEDLE VALVE

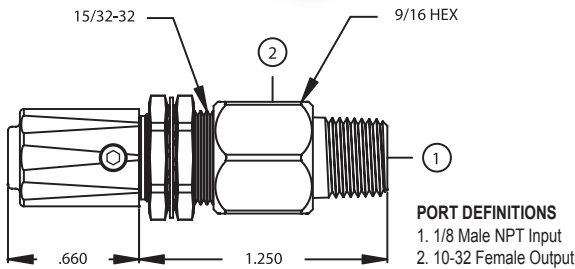

## Design Considerations

The NV Series Needle Valve promotes a compact design with multiple configurations to fit the exact end use application, 6.5 Turn Adjustment. The NV Series Needle Valves are available with a Smooth or Ribbed ABS Knob in Black or Gray. The Panel Mount Needle Valves require a .500 hole and are supplied with two Electroless Nickel Plated Panel Nuts.

\*\*\* Knobs are optional


## Specifications

Body & Panel Nuts: Electroless Nickel Plated Brass  
 Panel Mounting: 1/2" Panel Hole, 1/4" Max. Thickness

Maximum Operating Pressure – 0 - 125 psi  
 Maximum Operating Temperature – -25°F to 180°F  
 Flow Rate – 2.5 SCFM @ 50 psi

## Example of How to Order

NV 2 SV -B, 1/8MNPT, 10-32F, SB

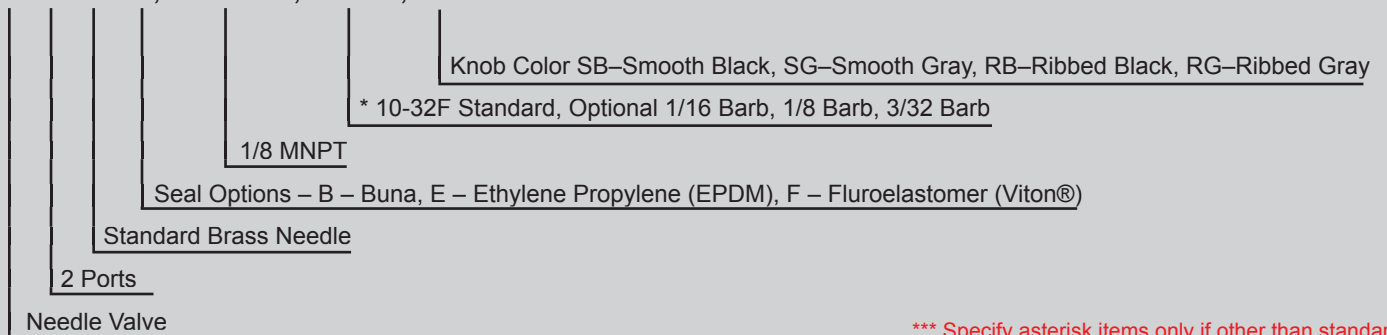

\*\*\* Specify asterisk items only if other than standard