


STANDARD NEEDLE VALVE

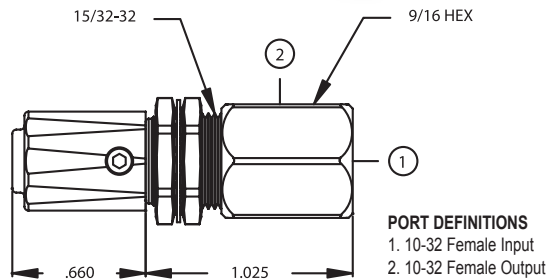

Design Considerations

The NV Series Needle Valve promotes a compact design with multiple configurations to fit the exact end use application. A 3-Turn Adjustment in the Needle is standard, 6.5 Turn Adjustment is available. The NV Series Needle Valves are available with a Smooth or Ribbed ABS Knob in Black or Gray. The Panel Mount Needle Valves require a .500 hole and are supplied with two Electroless Nickel Plated Panel Nuts and lock washer.

*** Knobs are optional


Specifications

Body & Panel Nuts: Electroless Nickel Plated Brass
 Stem: Brass
 Panel Mounting: 1/2" Panel Hole, 1/4" Max. Thickness

Maximum Operating Pressure – 0 - 125 psi
 Maximum Operating Temperature – -25°F to 180°F
 Flow Rate – 2.5 SCFM @ 50 psi

Example of How to Order

NV 2 SV -B,10/32F,* , SB

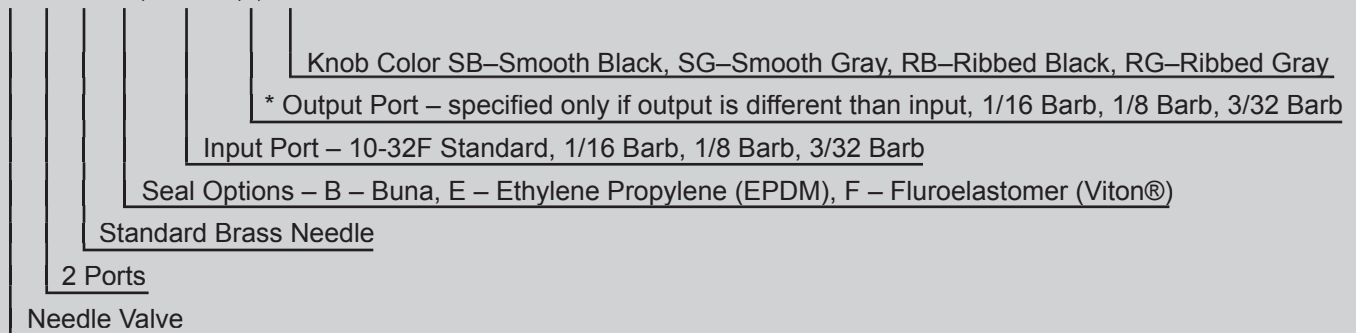

*** Specify asterisk items only if other than standard