


PRESSURE INDICATOR

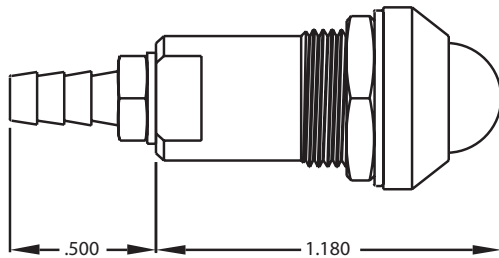

Design Considerations

The Pressure Indicator promotes a compact design with multiple configurations to observe the presence of pressure. The Pressure Indicator lens displays clear in the absence of pressure and displays bright when activated at approximately 5 psi. Air Indicators are available with Red or Green Display and Black, White or Gray Panel Mount Bezel. The Panel Mount Pressure Indicator requires a .500 hole and is supplied with one Electroless Nickel Plated Panel Nut and lock washer.

Specifications

Body & Piston: Electroless Nickel Plated Brass
 Spring: 302 Stainless Steel

Maximum Operating Pressure – 0 - 125 psi
 Minimum Operating Pressure – 10 psi
 Maximum Operating Temperature – Ambient

Example of How to Order

PRESSURE IND, RB, 1/16

Barbs – 1/16 (Standard), 3/32 Barb, 1/8 Barb, 10-32 Male, 1/8 Female NPT
 Bezel – B - Black ABS, G - Gray ABS, W - White ABS
 Indicator – R - Red ABS, G - Green ABS