


NON-PANEL MOUNT - 1/8 FNPT PUSH BUTTON VALVE



Design Considerations

The Standard Push Button Valve Series promotes a compact Normally Closed (Momentary only) design with multiple configurations to fit the exact end use application. The Push Button Valves are available with 2-Way (Non-Exhausting) or 3-Way (Exhausting 10-32 porting). The 3-Way (Exhausting) Push Button Valves relieve air around the button.

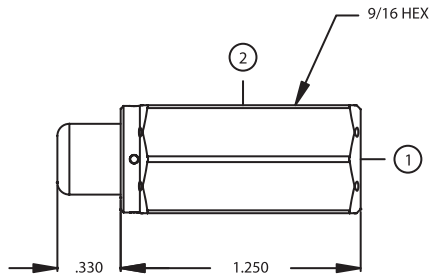

PORT DEFINITIONS
 1. 1/8 Female NPT Input
 2. 10-32 Female Output


Specifications

Body: Electroless Nickel Plated Brass
 Stem: Brass
 Spring: 302 Stainless Steel

Maximum Operating Pressure – 0 - 125 psi
 Maximum Operating Temperature – -25°F to 180°F
 Flow Rate – 2.5 SCFM @ 50 psi
 Actuation Force – Tested at 50 psi
 Std Spring, 4 lb

Example of How to Order

PB 2 NC-B, 1/8F, 10-32F,B, *, NPM

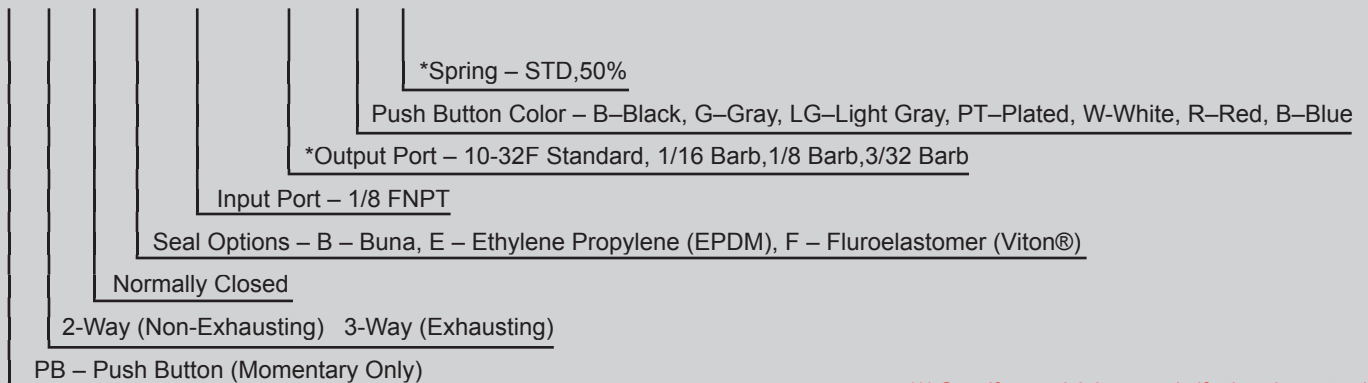

*** Specify asterisk items only if other than standard