


REGULATOR, CARTRIDGE



Design Considerations

The RG Regulator Series promotes a compact design with Non-Exhausting 10-32 Female porting configurations to fit the exact end use application. The Non-Exhausting Regulator can be used with air or fluids.

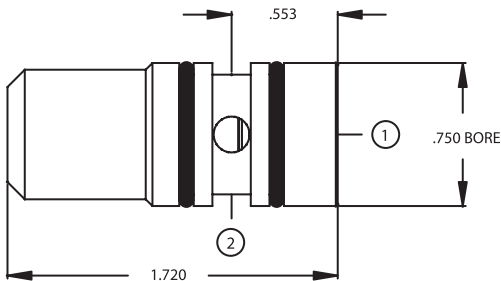

PORT DEFINITIONS
 1. Input
 2. Output

Specifications

Body: Electroless Nickel Plated Brass

Maximum Operating Pressure – 5 - 80 psi
 Maximum Operating Temperature – -25°F to 180°F
 Flow Rate – 3 SCFM @ 50 psi

Example of How to Order

