


SWIVEL TOGGLE VALVE



Design Considerations

The Special Toggle Valve Series promotes a compact Normally Closed design with multiple configurations to fit the exact end use application. The Toggle Valves are available with Detented or Momentary Handles, and with 2-Way (Non-Exhausting) or 3-Way (Exhausting) 10-32 Female porting. The 3-Way (Exhausting) Toggle Valves relieve air around the handle. The Panel Mount Toggle Valves require a .500 hole and are supplied with two Electroless Nickel Plated Panel Nuts and lock washer.

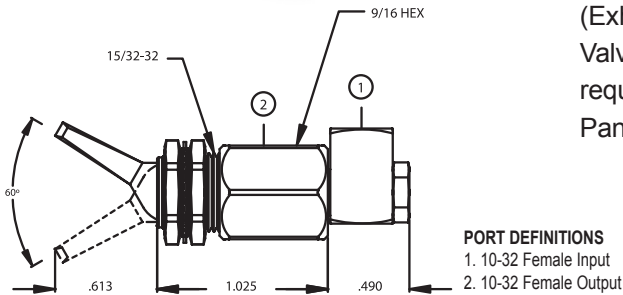



Specifications

Body & Panel Nuts: Electroless Nickel Plated Brass
Stem: Brass
Panel Mounting: 1/2" Panel Hole, 1/4" Max. Thickness
Spring: 302 Stainless Steel

Maximum Operating Pressure – 0 - 125 psi
Maximum Operating Temperature – -25°F to 180°F
Flow Rate – 2.5 SCFM @ 50 psi
Toggle Actuation Force – Tested at 50 psi
 Std Spring, 9 oz. Detented, 1lb 3 oz. Momentary

Example of How to Order

SWTA 2 NC -B,10-32F,*, G, *, *

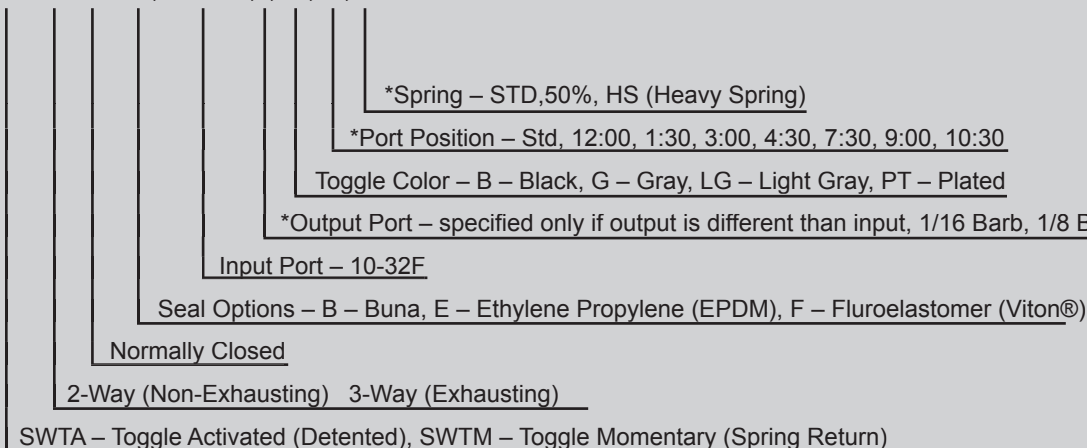

*** Specify asterisk items only if other than standard